

TECHNICAL SPECIFICATION


GIANT-C⁺

Washer



		Non-Heater	Heater
CYLINDER			
Drum Volume	cu.ft (l)	3.6 (102.7)	3.6 (102.7)
Diameter	in. (mm)	22.1 (560)	22.1 (560)
Depth	in. (mm)	16.5 (419.3)	16.5 (419.3)
Capacity	lb (kg)	22.5 (13)	22.5 (10.2)
DIMENSIONS			
Product (WxHxD)	in. (mm)	27 (686)x 38.7 (983)x 30.2 (767)	27 (686)x 38.7 (983)x 30.2 (767)
With Door Opening	in. (mm)	50.8 (1,291)	50.8 (1,291)
Carton (WxHxD)	in. (mm)	29.7 (755)x 44.4 (1,127)x 31.3 (795)	29.7 (755)x 44.4 (1,127)x 31.3 (795)
Weight (Product/Carton)	lb (kg)	191.8 (87)/211.6 (96)	191.8 (87)/211.6 (96)
SPEED			
Wash	RPM	50	50
Extract (High Speed)	RPM	1,150	1,150
G-force	G	413	413
RATING			
Electric Ratings	V/Hz/A	120/60/5 220-240/50/5 220/60/5	220-240/50/15-17.5
WATER USAGE			
Water Consumption	gal (l)	13.4 (50.8)	13.4 (50.8)
NOISE & CYCLE TIME			
Noise Level (Sound Power)	dB	Lower than 62	Lower than 62
Program Duration in Minutes (Default)	min	36	60 (60°C Program)
SYSTEM & CONTROL			
Inverter Direct Drive Motor		0	0
Intelligent Electronics Controls		0	0
Heating System	W	-	3,600
Compartment Dispenser		3 Compartment Dispensers	3 Compartment Dispensers
Forced Drain System		0	0
Pricing Program		Special Vended Price	Special Vended Price
PROGRAMS			
Program List		Hot Warm Cold Delicates Add Super Wash * Custom PGM	90°C (194 °F) 75°C (167 °F) 60°C (140 °F) 40°C (104 °F) Cold Delicates * Rinse+Spin
EXTERNAL FINISH			
Drum		Stainless Steel Drum	Stainless Steel Drum
Top Plate		Porcelain (Single) / Powder Painted Steel (Stack)	Porcelain (Single) / Powder Painted Steel (Stack)
Transparent Glass Window Door		0	0
Color		Platinum	Platinum
Cabinet		Painted Steel	Painted Steel
Cabinet Cover		Powder Painted Steel	Powder Painted Steel
Control Panel		Powder Painted Steel	Powder Painted Steel
Panel Frame		Powder Painted Steel	Powder Painted Steel
Panel Frame Lower		Powder Painted Steel	Powder Painted Steel
Window Display		Silk Screen	Silk Screen
Window		Aluminium	Aluminium
CIRCUIT PROTECTION			
PCB Fuse - Main Control Board	amps	8 (220-240V) 12 (120V)	8 (220-240V)
PCB Fuse - Filter Assembly	amps	15	15
		Non-Heater	Heater
Single		Coin F1069FD4P GCWP1069QS2 FH069FD4P	Card F1069FD7P GCWP1069CS2 FH069FD7P
Stack		OPL F1069FD2P GCWP1069QD2 FH069FD2P	OPL F1069FD3S WD-1069BD3S F1069FD3PS

* Dimensions and weights are approximate. * Design, features and specifications subject to change without notice.
* Some models may not be available for sales in certain countries. * Model name can be varied by countries.

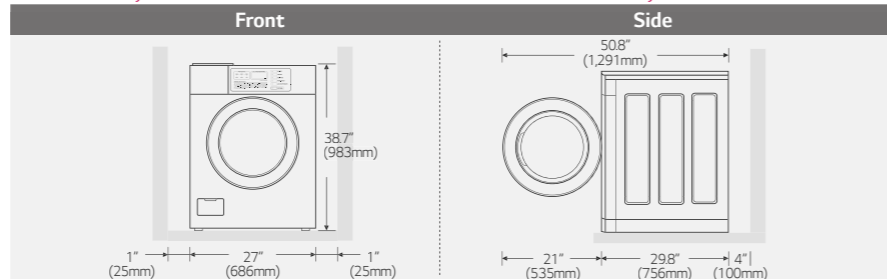

Dryer



Weather Hood Type	Number of 90° Elbows	Maximum length of 4" (10.2cm) diameter rigid metal duct	Maximum length of 4" (10.2cm) diameter flexible metal duct
Recommended	0	65 feet (19.8m)	45 feet (13.7m)
 4" (10.2 cm)	1	55 feet (16.8m)	35 feet (10.7m)
	2	47 feet (14.3m)	30 feet (9.1m)
	3	36 feet (11.0m)	25 feet (7.6m)
	4	28 feet (8.5m)	20 feet (6.1m)
 2-1/2" (6.35 cm)	0	55 feet (16.8m)	35 feet (10.7m)
	1	47 feet (14.3m)	27 feet (8.2m)
	2	41 feet (12.5m)	21 feet (6.4m)
	3	30 feet (9.1m)	17 feet (5.2m)
	4	22 feet (6.7m)	15 feet (4.5m)

		Gas	Electric
CYLINDER			
Drum Volume	cu.ft (l)	7.3 (207)	7.3 (207)
Diameter	in. (mm)	26.1 (663)	26.1 (663)
Depth	in. (mm)	22.5 (570.6)	22.5 (570.6)
Capacity	lb (kg)	22.5 (10.2)	22.5 (10)
DIMENSIONS			
Product (WxHxD)	in. (mm)	27 (686)x 38.7 (983)x 30.1 (764)	27 (686)x 38.7 (983)x 30.1 (764)
With Door Opening	in. (mm)	49.8 (1,264)	49.8 (1,264)
Carton (WxHxD)	in. (mm)	29.9 (760)x 46.1 (1,170)x 31.3 (795)	29.9 (760)x 46.1 (1,170)x 31.3 (795)
Weight (Product/Carton)	lb (kg)	130 (59)/143 (65)	130 (59)/143 (65)
RATING			
Electric Ratings	V/Hz/A	120/60/5 220-240/50/2.4 220/60/3	120 (240)/60/26 220-240/50/22.5 220/60/21 240/50/19.5
OPERATION			
Heating Type		Gas	Electric
Type of Drying		Ventilation	Ventilation
Air Flow	CFM	160	160
Motor	KW	0.4 (120V/60Hz)	0.4 (120V/60Hz)
		0.3 (220-240V/50Hz)	0.3 (220-240V/50Hz)
		0.4 (220V/60Hz)	0.4 (220V/60Hz)
Gas Ratings	KW/BTU	5.8/20,000	-
Heating Element	W	-	5,400 ¹⁾
Program Duration in Minutes (Default)	min	45	45
CONNECTIONS			
Air Outlet Diameter	in. (mm)	4 (100)	4 (100)
Exhaust Airflow Diameter	in. (mm)	4 (100)	4 (100)
SYSTEM & CONTROL			
Pricing Program		Special Vended Price	Special Vended Price
Intelligent Electronic Controls		0	0
PROGRAMS			
Program List		High Temp Med Temp Low Temp No Heat	High Temp Med Temp Low Temp No Heat
EXTERNAL FINISH			
Top Plate		Porcelain (Single) / Powder Painted Steel (Stack)	Porcelain (Single) / Powder Painted Steel (Stack)
Transparent Glass Window Door		0	0
Color		Platinum	Platinum
Cabinet		Painted Steel	Painted Steel
Cabinet Cover		Powder Painted Steel	Powder Painted Steel
Control Panel		Powder Painted Steel	Powder Painted Steel
Panel Frame		Powder Painted Steel	Powder Painted Steel
Panel Frame Lower		Powder Painted Steel	Powder Painted Steel
Window Display		Silk Screen	Silk Screen
Window		Aluminium	Aluminium
		Gas	Electric
		Coin	Card
Single		RN1329AN4 GD1329QGS2	RN1329AD1 GD1329CGS2
Stack Upper		RN1329AN7S GD1329QGW2 RP1329AN7S	RN1329AD5S GD1329CGW2
Stack Lower		RN1329AN1 GD1329QGD2	RN1329AD6 GD1329CGD2
		OPL	OPL
		RN1329A4 GD1329LGS2 RN1329A4S RN1329CD4P GDP1329CGS2	RV1329AN4 GD1329QES2 RV1329AN4S
		RV1329AN7S GD1329QEW2	RV1329AD5S GD1329CEW2
		RV1329AN1 GD1329QED2	RV1329AD6 GD1329CED2
		RV1329A4 GD1329LES2 TD-V1329EA4 RV1329A4S	RV1329A7S GD1329LEW2 TD-V1329EA7
		RV1329A1 GD1329LED2 RV1329A1S	

* Dimensions and weights are approximate. * Design, features and specifications subject to change without notice.
* Some models may not be available for sales in certain countries. * Model name can be varied by countries.
1) 4,500W for some countries due to power limitation (e.g. Australia)

