


Speed Queen

COMMERCIAL/HOMESTYLE
Topload WASHERS & DRYERS

LWS16/LWS17
LES37/LGS37

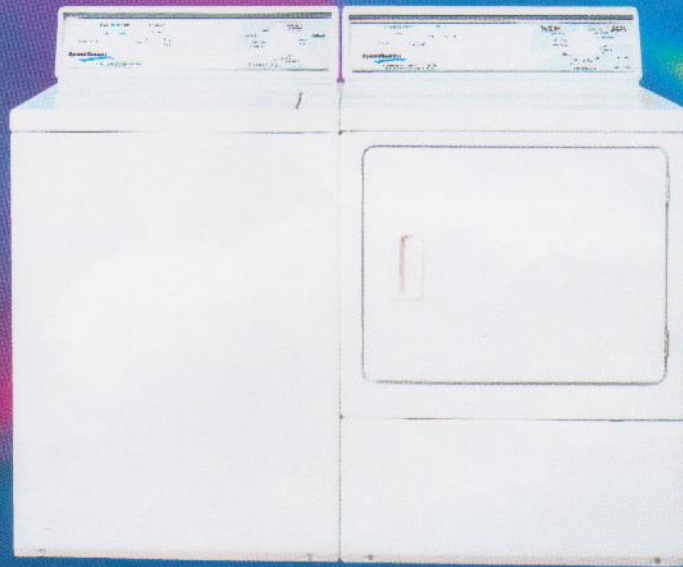

Speed Queen®

OUR STRENGTH COMES FROM WITHIN

COMMERCIAL/HOMESTYLE WASHERS & DRYERS SPECIFICATIONS



LWS16/LWS17
Single Speed • 7 cycles • 3 Wash/Rinse Temperatures
LWS16 Large White Porcelain Tub, LWS17 Large Stainless Steel Tub
Bleach Dispenser • Variable Rotary Water Level Control
Wavy Vane Agitator

LES37 / LGS37
6 Cycles • Polyester Lint Filter
3 Position Fabric Selector • Optional Drying Rack
Reversible Door

Model	LWS16/LWS17
Speeds	1
Cycles	7
	<ul style="list-style-type: none"> • Reg.-Extra Clean • Reg.-Normal • Reg.-Light • Perm Press-Normal • Perm Press-Light • Delicate-Normal • Delicate-Light
Water Temp.	3
	<ul style="list-style-type: none"> • Hot/Cold • Warm/Cold • Cold/Cold
Features	
Lint Filter	Self-Cleaning
Water Levels	Variable Rotary
Agitator	Wavy Vane
Basket Volume - DOE cu. ft.	3.3 (Extra Large)
Top and Lid Finish	Tuff Guard
Basket type	White Porcelain/ Stainless Steel
Dispenser	Bleach, Fabric Softener
Color	White
Rear Leveling Legs	Self-Adjusting
Dimensions	
Width - in (mm)	25 5/8" (651)
Depth - in (mm)	28" (711)
Height - in (mm)	43" (1092)
Cabinet Height - in (mm)	36" (914)
Net Weight- lb (kg)	180 (82)
Agency Approvals	UL
Motor: 1/2 HP reversing, permanently lubricated with a built-in automatic thermal overload protector.	
Electrical Requirements: Grounded 3-wire, 120V, 60 Hz AC, 15 amp circuit separately fused. 230V/50Hz available. Heights may vary slightly depending on leveling adjustments.	

COMMERCIAL QUALITY

Built tough to stay that way. The No. 1 supplier of commercial coin-operated laundry equipment, Speed Queen continues to lead in customer satisfaction. Speed Queen homestyle washers and dryers feature many of the same rugged, reliable parts found in the coin-operated machines, so they're built to last.



Model	LES37/LGS37
Cylinder Volume	7.0 cu. ft.
Cycles	6
Auto	
Regular/Delicate	<ul style="list-style-type: none"> • More Dry • Less Dry
Permanent Press/Knits	<ul style="list-style-type: none"> • More Dry • Less Dry
Time	<ul style="list-style-type: none"> • More Dry • Less Dry
Temperature	3
	<ul style="list-style-type: none"> • Delicate • No Heat • Regular/Perm Press
Features	
Cylinder Coating	Powder Paint
Door Opening	180° Side Swing Reversible
Lint Filter	Secured
Color	White
Energy Input (Elec.)	5350W
Energy Input (Gas)	22,500 Btu
Dimensions	
Width - in (mm)	26 7/8" (683)
Depth - in (mm)	28" (711)
Height - in (mm)	43" (1092)
Cabinet Height - in (mm)	36" (914)
Net Weight - lb (kg)	Elec: 130 (59) Gas: 135 (61)
Agency Approvals	Elec: UL Gas: CSA Star
Motor: 1/3 HP, permanently lubricated with a built-in automatic thermal overload protector.	
Electrical Requirements: (Elec.) 3 wire system (neutral conductor grounded), 120/240V, 60 Hz AC, 30 amp circuit separately fused. (Gas) 2 wire plus grounded (earth) wire system, 120V, 60 Hz AC, 15 amp circuit separately fused. 230V/50Hz available. Heights may vary slightly depending on leveling adjustments.	
Speed Queen's continuing commitment to quality products may mean a change in specifications without notice.	
The quality management systems at Alliance Laundry Systems manufacturing facilities are ISO9001:2000 compliant.	



©Copyright 2005 Alliance Laundry Systems LLC

Commercial Built Better To Last Longer!